



CAPE  
CULTURE

WINSTERS

KAYO

WOODEN DOORS AND DOOR FRAMES



A PROUD MEMBER OF THE SWARTLAND FAMILY



## CONTENTS

SWARTLAND RANGES	4
CAPE CULTURE DOORS	6
WINSTERS DOORS	16
KAYO DOORS	32
DOOR INSTALLATION	43

## SANS613 CERTIFIED

Selected doors are SANS 613 certified (Mechanical Performance Criteria).

### CUSTOM-MADE

When ordering a non-standard product, please take lead time, cost implications and purpose-made guidelines into account.

For details visit [www.swartland.co.za](http://www.swartland.co.za)

## SUSTAINABILITY IS DEEPLY INGRAINED

We pride ourselves on our integrity and insist that our natural resources be utilised in a sustainable way. After all, we're thinking long-term.

### IN THE FOREST

Managed responsibly, wood is a renewable resource. We give preference to responsible loggers and use plantation-grown timber where possible. Our staff carefully monitor the harvesting process on-site.

### IN THE FACTORY

We're committed to reducing waste. Our recycling programme uses excess wood chips to fuel the boilers that kiln-dry our wood, while our air-management system dramatically reduces harmful emissions.

### IN THE HOME

Composite gaskets in selected products for improved thermol performance.



## READY - 2 - FIT

PRE-SEALED, PRE-GLAZED



Our **READY-2-Fit range** of wooden windows and doors are spray-sealed and pre-glazed in the manufacturing process. Made locally to European standards and unique to Swartland, these low-maintenance products are available in 8 stylish colours, offering best-in-class energy efficiency and flawless finishes.



## WINSTERS

QUALITY YOU CAN AFFORD



SWARTLAND  
5 YEAR  
GUARANTEE

The **WINSTERS RANGE** is our most popular range, providing a host of superior features that allow you to experience Swartland quality at a competitive price. This range includes a range of fibreglass and powder-coated steel doors.

## CAPE CULTURE

WHEN ONLY THE BEST WILL DO



SWARTLAND  
10 YEAR  
GUARANTEE

Our **CAPE CULTURE range** features our flagship products. All these products represent the very best of Swartland in terms of quality and guarantees. Unique to this range are sliding sash and gliding windows and fire-rated aluminium insert doors.

## KAYO


VALUE FOR MONEY



SWARTLAND  
1 YEAR  
GUARANTEE

Our **KAYO RANGE** offers access to Swartland's world-class quality at an affordable price. The range has wide variety of hardwood and pine windows and door. Included in this range are Pivot-in-frame doors, a wide range of interior doors as well as a range of steel doors.

ANATOMY OF A DOOR

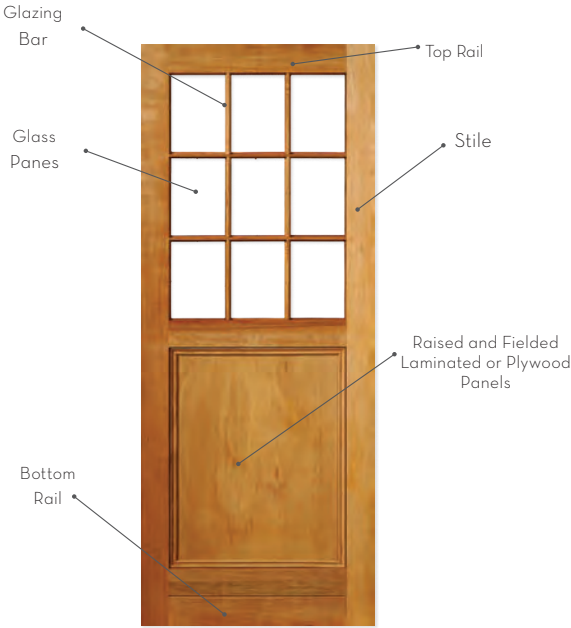

PIVOT-IN-FRAME RANGE




DOOR RANGE

Durability, craftsmanship and increased thermal performance are at the core of Swartland products. We offer guarantees on all doors, backed up by knowledgeable national service teams.

ENGINEERED STILES

We use a unique configuration of hardwood pieces, laminated and joined to stabilise the timber.

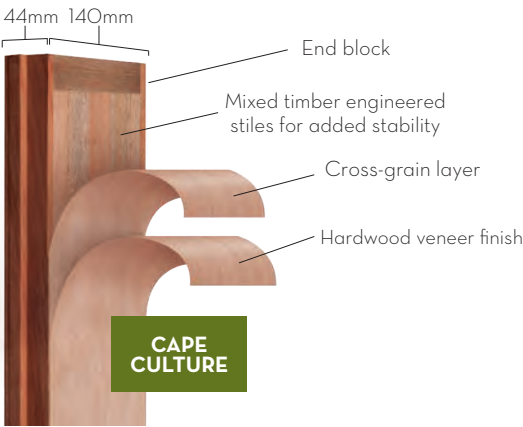

\* available on selected doors

DOOR APPLICATION GUIDELINES

E Exterior	S Semi-Exterior	I Interior	Fire-Resistant	Usage
Frequent exposure to unprotected open-air conditions. Please be aware that an over-hang above the door is recommended.	Infrequent and partial exposure to unprotected open-air conditions. Do not expose to direct sunlight or rain. Please be aware that an over-hang above the door is a requirement.	Exposed to dry, sheltered (indoor) conditions only. Internal use only.	Fire-resistant doors forms part of a Class E fire-rating system. (30 minutes)	<b>L</b> Light Duty (Domestic / Interior usage) <b>M</b> Medium Duty (Domestic / Commercial usage) <b>H</b> Heavy Duty (Frequent / Security usage)
Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	





**DIFSD16P/1.2**

**DIFSD24P/1.2**



**DIFSD25P/1.2**  
(0,933)

**DIFPD26P/1.2**



**DIFSD30P/1.2**

**DIFSD31P/1.2**

PIVOT-IN-FRAME SIZES	
Overall Size W x H	Door Size W x H
1348 x 2144	1200 x 2032

## ENTRANCE DOORS 2.4m HIGH

We know how to make an entrance. Engineered design, sturdy construction and thicker wood add up to a door that's made to stand the test of time.



**SD26/2.4**

**SD30/2.4**

AVAILABLE IN: 813mm WIDE x 2360mm HIGH  
Figures in brackets indicate estimated glass area.  
As viewed from the outside.

## BOLECTION MOULD, RAISED AND FIELDLED PANEL DOORS



**SD19**  
(0,523)

**SD19S**  
(0,441)



**SD24**

**SD18**  
(0,547)

STANDARD SIZES: 813mm WIDE x 2032mm HIGH

Doors as viewed from the outside.

**1210mm x 2032mm and 1612mm x 2032mm**  
available on selected doors.

**L** Light Duty **M** Medium Duty **H** Heavy Duty

**E** Exterior **S** Semi-Exterior **I** Interior **F** Fire-Resistant


## PANEL AND TRADITIONAL DOORS



**SD2/OB/BR**  
Also available in  
SD2/PB



**SD25**  
(0,547)




**SD26**



**SD30**

## GATE AND LOUVRE DOOR



**SD12**  
GATE



**SD21**  
LOUVRE

Figures in brackets indicate estimated glass area.

[www.swartland.co.za](http://www.swartland.co.za)

**READY - 2 - FIT**  
PRE-SEALED, PRE-GLAZED - RANGE FOR INSTALLERS

All doors are available in our pre-sealed, pre-glazed Ready-2-Fit range.

**L** Light Duty **M** Medium Duty **H** Heavy Duty  
**E** Exterior **S** Semi-Exterior **I** Interior **F** Fire-Resistant

Figures in brackets indicate estimated glass area.

[www.swartland.co.za](http://www.swartland.co.za)

## MDF DOORS


To complement our exterior range, we offer four styles of interior doors, from classic to contemporary. With noise reduction, solid construction and a smooth finish, these doors add class and style to any home.



**MDF - Classique**  
**MDFCSSH10**




**MDF - Elegance**  
**MDFELGH10**



**MDF - Horizontal**  
**MDFHRZH10**  
**MDFHRZH10/2.4**

## ALUMINIUM INSERT DOORS

This trendy, modern pre-finished door offers solid laminated construction and is suitable for exterior, heavy-duty application. It has a Class-E fire rating and is finished in imbuia, with aluminium inserts.

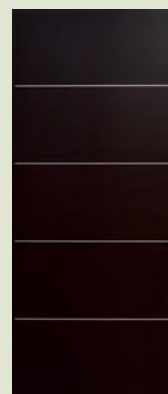

**5mm Aluminium Insert**  
**UD0011332 - SD802 IMB**

**L** Light Duty **M** Medium Duty **H** Heavy Duty  
**E** Exterior **S** Semi-Exterior **I** Interior **F** Fire-Resistant



## STANDARD HEIGHT PATIO FULL GLASS

As viewed from the outside.

140mm



Product Code	Width	Height
SD7	813mm	2032mm
SD7/1210	1210mm	2032mm
SD7/1612	1612mm	2032mm

Available on request

**S** SD7  
**M** (0,939)



Product Code	Width	Height
SD20	813mm	2032mm
SD20/1210	1210mm	2032mm
SD20/1612	1612mm	2032mm

Available on request

**S** SD20  
**M** (0,897)

## STANDARD HEIGHT PATIO GUNSTOCK STILE


As viewed from the outside.



Product Code	Width	Height
SD22	813mm	2032mm
SD22/1210	1210mm	2032mm
SD22/1612	1612mm	2032mm

Available on request

**S** SD22  
**M** (0,701)



Product Code	Width	Height
SD23	813mm	2032mm
SD23/1210	1210mm	2032mm
SD23/1612	1612mm	2032mm


Available on request

**S** SD23  
**M** (0,731)

## STANDARD HEIGHT PATIO SMALL PANE

As viewed from the outside.

140mm



Product Code	Width	Height
SD10	813mm	2032mm
SD10/1210	1210mm	2032mm
SD10/1612	1612mm	2032mm

Available on request

**S** SD10  
**M** (0,908)



Product Code	Width	Height
SD11	813mm	2032mm
SD11/1210	1210mm	2032mm
SD11/1612	1612mm	2032mm


Available on request

**S** SD11  
**M** (0,897)


STANDARD WIDTHS: 813mm, 1210mm, 1612mm  
STANDARD HEIGHT: 2032mm.

When ordering double doors, please indicate if open-in or open-out is required. Figures in brackets indicates estimated glass area.


## FOLD-A-SIDE DOORS




3-door  
2584w x 2115h




4-door  
3404w x 2115h



5-door  
4232w x 2115h




6-door  
5052w x 2115h



6-door centre  
5052w x 2115h

## SWARTLAND STANDARD DOOR REBATE

TOP VIEW







When ordering, doors are always to be viewed from the outside.

## DOOR FRAMES

Made for 44mm thick doors, with or without sills.  
Sills are recommended for exterior usage only.  
Please specify when ordering.








DOOR FRAMES	
	
SK1 813mm(w)	SK1 813mm(w)
86 X 67	86 X 67
With Sill	No Sill
OI-2125/OO-2112(h)	2114(h)
923(w)	923(w)
SKA1 813mm(w)	SKA1 813mm(w)
86 X 51	86 X 51
With Sill	No Sill
OI-2109/OO-2096(h)	2098(h)
891(w)	891(w)
SK6 762mm(w)	SKA5 762mm(w)
86 X 67	86 X 51
No Sill	No Sill
2114(h)	2098(h)
872(w)	840(w)
	When placing an order for your door frame, please indicate if it should open in or open out by adding /oi or /oo to the order code.

DOOR FRAMES	
	
SK2 1210mm(w)	SK2 1210mm(w)
86 X 67	86 X 67
With Sill	No Sill
OI-2125/OO-2112(h)	2114(h)
1320(w)	1320(w)
SKA2 1210mm(w)	SKA2 1210mm(w)
86 X 51	86 X 51
With Sill	No Sill
OI-2109/OO-2096(h)	2098(h)
1288(w)	1288(w)
	When placing an order for your door frame, please indicate if it should open in or open out by adding /oi or /oo to the order code.


## DOOR FRAMES

Constructed from solid laminated wood, all our frames are fitted with Composite Gaskets to prevent drafts.

DOOR FRAMES	
	
SK3 1612mm(w)	SK3 1612mm(w)
86 X 67	86 X 67
With Sill	No Sill
OI-2125/OO-2112(h)	2114(h)
1722(w)	1722(w)
SKA4 1612mm(w)	SKA4 1612mm(w)
86 X 51	86 X 51
With Sill	No Sill
OI-2109/OO-2096(h)	2098(h)
1690(w)	1690(w)
	When placing an order for your door frame, please indicate if it should open in or open out by adding /oi or /oo to the order code.

DOOR FRAMES WITH TOP-LIGHT OPENERS		
		
SK1B	SK2B	SK3B
86 X 67	86 X 67	86 X 67
(0,256)	(0,377)	(0,256)
OI-2502/OO-2492(h)	OI-2502/OO-2492(h)	OI-2502/OO-2492(h)
When placing an order for your door frame, please indicate if it should open in or open out by adding /oi or /oo to the order code.		

## SWARTLAND STANDARD DOOR REBATE



When ordering, doors are always to be viewed from the outside.



## PIVOT-IN-FRAME RANGE

Open your home and let nature in. These doors are able to span the largest opening of all our doors.



Window only available  
in bronze colour



Fitted with bronze  
colour glass

## FIBREGLASS PIVOT


Fibreglass entry doors have the look of real wood, but will not swell, shrink, crack, warp or twist. They are weather-resistant, so they make excellent exterior doors.



Pivot Doors are supplied pre-hung including lock and handles are supplied loose, requiring fitting (just in case the customer wants to use other handles)

## FIBREGLASS DOORS

As viewed from the outside.

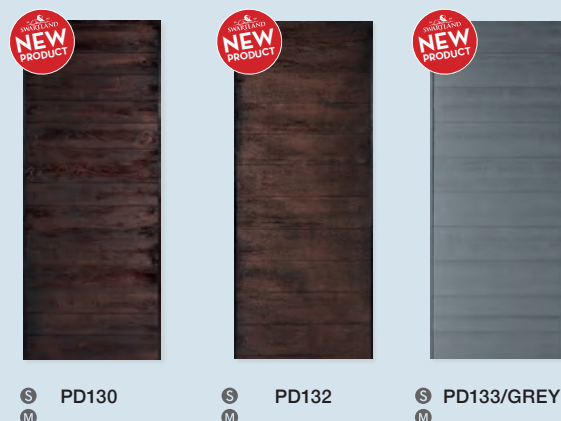


## ENTRANCE AND BACK DOORS

As viewed from the outside.

We have a wide range of front and back doors to choose from. This range includes a variety of panel configurations, designed for both traditional and contemporary homes.



Front

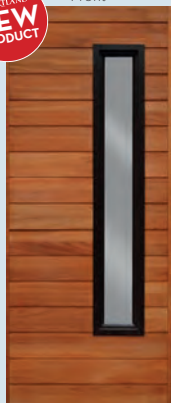

S  
M

**PD611**

Window only available  
in bronze colour


Front



S  
M


**PD80**

Horizontal slatted  
glass panel door  
(0,259)

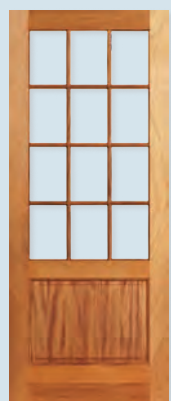


S  
M

**PD19**  
(0.696)

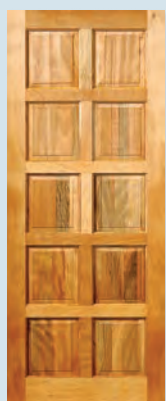

S  
M

**PD30**  
Colonial  
Ten Panel

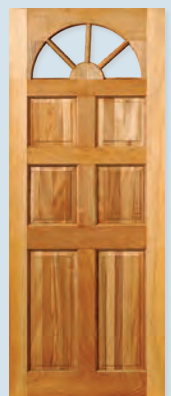

S  
M

**PD46**  
Carolina  
(0,166)

Not available in 1210



S  
M

**PD48**  
Kentucky  
(0,562)


Not available in 1210

**STANDARD SIZES:** 813mm WIDE x 2032mm HIGH.  
2032mm(h) x 762mm/1210mm/1612mm overall sizes available  
on request. As viewed from the outside.

## RAISED AND FIELDLED PANEL DOORS

As viewed from the outside.


Stable doors are very practical and often used as a kitchen back door.

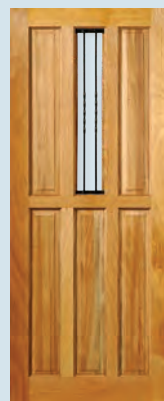

S  
M

**PD56**


Security Single  
Vent (0,111)  
Not available in 1210

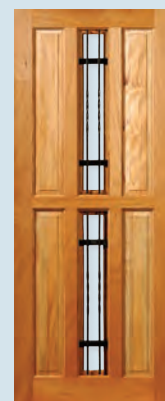

S  
M


**PD58**

Security Double  
Vent (0,111)  
Not available in 1210

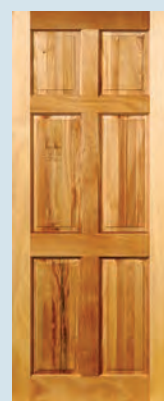

S  
M

**PD26**  
Colonial  
Six Panel

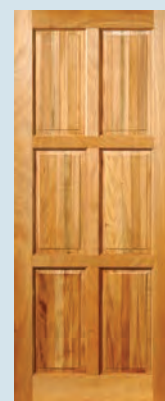

S  
M


**PD26E**  
Equal  
Six Panel



S  
M

**PD28**

Colonial  
Eight Panel  
Also available in  
PD28S (Stable)

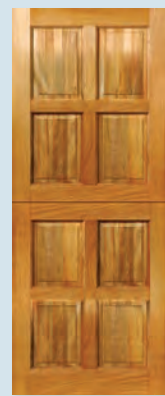

S  
M

**PD28S**  
Colonial  
Eight Panel  
(Stable)

**STANDARD SIZES:** 813mm WIDE x 2032mm HIGH.  
2032mm(h) x 762mm/1210mm/1612mm overall sizes available  
on request. As viewed from the outside.




## RAISED AND FIELDLED PANEL DOORS

As viewed from the outside.



**PD20**  
Two Panel

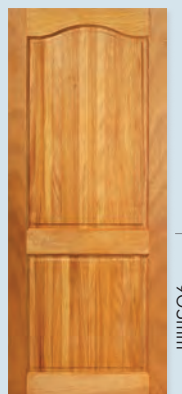


**PD22**  
Two Panel  
Cape Dutch


905mm




**PD24**  
Four Panel

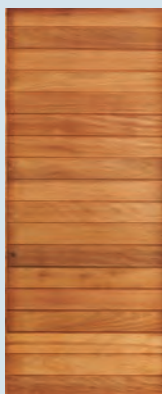

**PD60**  
Narrow Horizontal  
Slatted Door  
Also available in PD60S  
(Stable) 1612

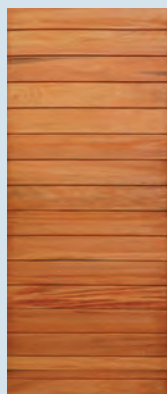

**PD61**  
Wide Horizontal  
Slatted Door

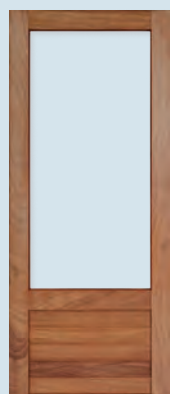

**PD90**



**PD91**




**PD92**

905mm

## TRADITIONAL WEATHERBOARD BACK DOORS

As viewed from the outside.

Front



**PD1/OB**  
Also available in  
672/1210/1612  
Also in available  
PD1S/OB (Stable)

Back



**PD1/OB/BR**  
Also available in  
PD1S/OB/BR (Stable)


Viewed from inside

Back




**PD1/PB**  
Also available in  
1210/1612/762

Viewed from inside

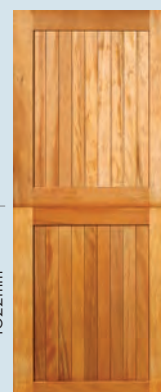


**PD1S/PB**  
Also available in  
762 wide (Stable)

1022mm



**PD1H**



**PD1HS**  
(Stable)


905mm

Figures in brackets indicate estimated glass area.

Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

## TRADITIONAL WEATHERBOARD BACK DOORS


As viewed from the outside.

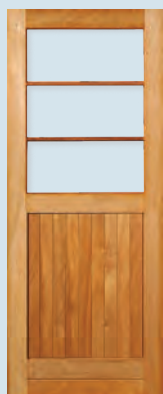


**S** PD2/PB  
**M** (0,519)



**S** PD5S/PB/OI  
**M** PD5S/PB/OO  
(Stable) (0,501)

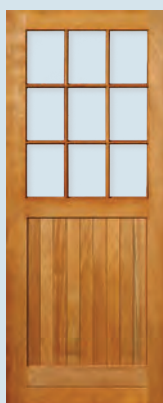

**S** PD5/PB  
**M** (0,504)

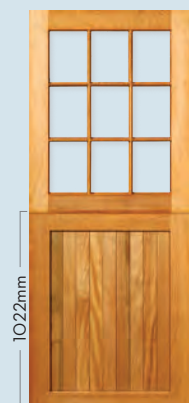

**S** PD5S/PB/OI  
**M** PD5S/PB/OO  
(0,486)  
(Stable)



**S** PD13  
**M** (0,533)



**S** PD13S/OO  
**M** (0,512)  
(Stable)

## TRADITIONAL PLY PANEL BACK DOORS

As viewed from the outside.



**S** PD8  
**M**



**S** PD8S/OI  
**M** PD8S/OO  
(Stable)

Figures in brackets indicate estimated glass area.

SATAS approved for exterior (Class 1) application with heavy-duty usage. Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

All doors available in 813 x 2032



**S** PD9  
**M** (0,512)



**S** PD9S/OI  
**M** PD9S/OO  
(0,502)  
(Stable)

Figures in brackets indicate estimated glass area.

Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

ALL DOORS AVAILABLE: 813mm WIDE x 2032mm HIGH



## TRADITIONAL PLY PANEL BACK DOORS


As viewed from the outside.



**PD10**  
(0,504)  
Also available in  
1612 wide



**PD10S/OI**  
PD10S/OO  
(0,486)  
(Stable)

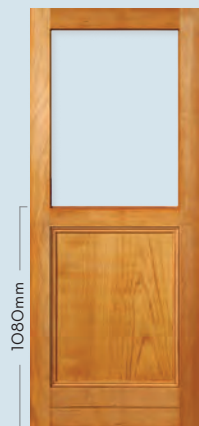


**PD14**  
(0,533)




**PD14S/OI**  
PD14S/OO  
(0,512)  
(Stable)

## FLYSCREEN DOORS

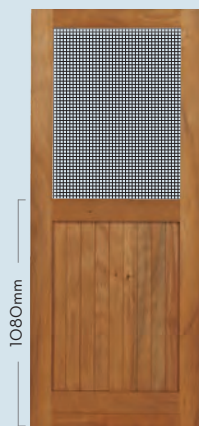

**PD73**  
(0,502)

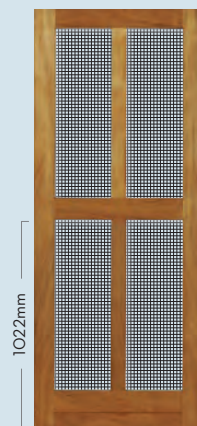

**PD74**  
(0,920)

ALL DOORS AVAILABLE: 813mm WIDE x 2032mm HIGH



## PATIO DOOR RANGE

Our patio doors are available in five different designs to complement any architectural style, from the classic French look to a modern vernacular.

STANDARD WIDTHS: 813mm, 1210mm, 1612mm.  
STANDARD HEIGHT: 2032mm.



**PD12**  
(0,729)

Product Code	Width	Height
PD12	813mm	2032mm
PD12/1210	1210mm	2032mm
PD12/1612	1612mm	2032mm



**PD11**  
(0,695)

Product Code	Width	Height
PD11	813mm	2032mm
PD11/1210	1210mm	2032mm
PD11/1612	1612mm	2032mm

## FULL GLASS PATIO - STANDARD HEIGHT



**PD3**  
(1,074)

Product Code	Width	Height
PD3	813mm	2032mm
PD3/1210	1210mm	2032mm
PD3/1612	1612mm	2032mm

Available on request



**PD4**  
(1,008)


Product Code	Width	Height
PD4	813mm	2032mm
PD4/1210	1210mm	2032mm
PD4/1612	1612mm	2032mm




**PD6**  
(1,020)

Product Code	Width	Height
PD6	813mm	2032mm
PD6/1210	1210mm	2032mm
PD6/1612	1612mm	2032mm


Available on request




3-door  
2584w x 2115h




4-door  
3404w x 2115h



5-door  
4232w x 2115h



6-door  
5052w x 2115h



6-door centre  
5052w x 2115h


As viewed from the outside.  
Figures in brackets indicate estimated glass area.

As viewed from the outside.  
Figures in brackets indicate estimated glass area.



## FULL PANE SLIDING DOORS

Sliding doors are brilliant space-savers because there's no opening or closing arc, and are perfect for integrating entertainment areas with the rest of your home.

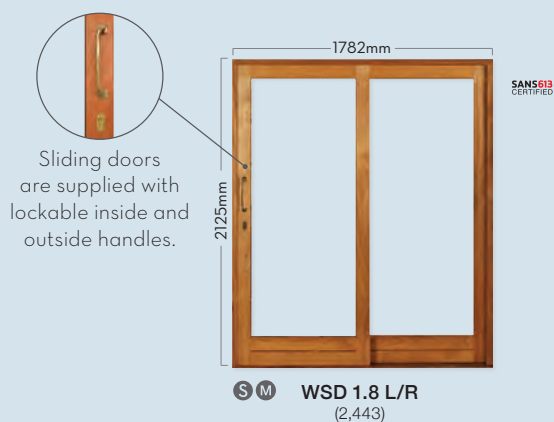


Product Code	Width	Height
WSD 1.8 L/R	1782mm	2140mm
WSD 2.1 L/R	2082mm	2140mm
WSD 2.4 L/R	2382mm	2140mm
WSD 3.0 L/R	2982mm	2140mm
WSD 3.120 L/R	3112mm	2140mm
WSD 3.515 L/R	3507mm	2140mm
WSD 4.115 L/R	4107mm	2140mm

Figures in brackets indicate estimated glass area. When ordering Winsters Sliding doors, please indicate left-hand or right-hand opening when viewed from the outside.

## SMALL PANE SLIDING DOORS

As viewed from the outside.

Our superior rail hardware allows these doors to open and close effortlessly. Composite gaskets provide advanced thermal insulation.

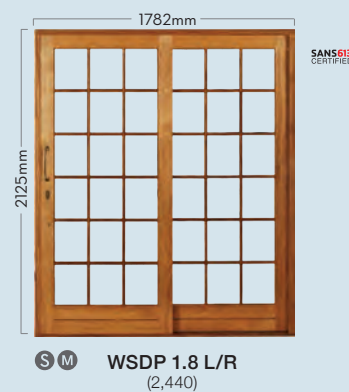



Product Code	Width	Height
WSDP 1.8 L/R	1782mm	2140mm
WSDP 2.1 L/R	2082mm	2140mm
WSDP 2.4 L/R	2382mm	2140mm
WSDP 3.0 L/R	2982mm	2140mm
WSDP 3.120 L/R	3112mm	2140mm
WSDP 3.515 L/R	3507mm	2140mm
WSDP 4.115 L/R	4107mm	2140mm



Figures in brackets indicate estimated glass area. When ordering Winsters Sliding doors, please indicate left-hand or right-hand opening when viewed from the outside.



## WINSTERS DOOR FRAMES




Made for 40mm thick doors, with or without sills.  
Sills are recommended for exterior usage only.  
Please specify when ordering.  
Wide range of section thickness is available.

DOOR FRAMES	
	
FB1 813mm(w)	FB1 813mm(w)
86 X 42	86 X 42
With Sill	No Sill
OI-2100/OO-2088(h)	2084(h)
873(w)	873(w)
FA1 813mm(w)	FA1 813mm(w)
86 X 51	86 X 51
With Sill	No Sill
OI-2109/OO-2096 (h)	2098(h)
891(w)	891(w)

DOOR FRAMES	
	
FB2 1210mm(w)	FB2 1210mm(w)
86 X 42	86 X 42
With Sill	No Sill
OI-2100/OO-2088(h)	2084(h)
1270(w)	1270(w)
FA2 1210mm(w)	FA2 1210mm(w)
86 X 51	86 X 51
With Sill	No Sill
OI-2109/OO-2098(h)	2098(h)
1288(w)	1288(w)

## WINSTERS DOOR FRAMES

Constructed from solid laminated and finger-jointed wood, our frames are fitted with composite gaskets to prevent drafts.

DOOR FRAMES		
		
FB4 1612mm(w)	FB4 1612mm(w)	FB5 762mm(w)
86 X 42	86 X 42	86 X 42
No Sill	With Sill	No Sill
2084(h)	OI-2100/OO-2088(h)	2084(h)
1672(w)	1672(w)	822(w)
FA4 1612mm(w)	FA4 1612mm(w)	FA5 762mm(w)
86 X 51	86 X 51	86 X 51
No Sill	With Sill	No Sill
2098(h)	OI-2109/OO-2098(h)	2098(h)
1690(w)	1690(w)	840(w)

## PIVOT-IN-FRAME DOORS


Kayo doors are made to the highest standards. Strength, durability, quality wood and manufacturing excellence ensure these doors are built to last.



**S** All Pivot-in-frame doors are available in 1290mm (w) x 2115mm (h)

Our Pivot-in-frame solution saves time and money. These are delivered fully assembled, fitted with a stainless-steel barrel lock and wrapped in plastic for protection.

## PIVOT-IN-FRAME HARDWOOD DOORS

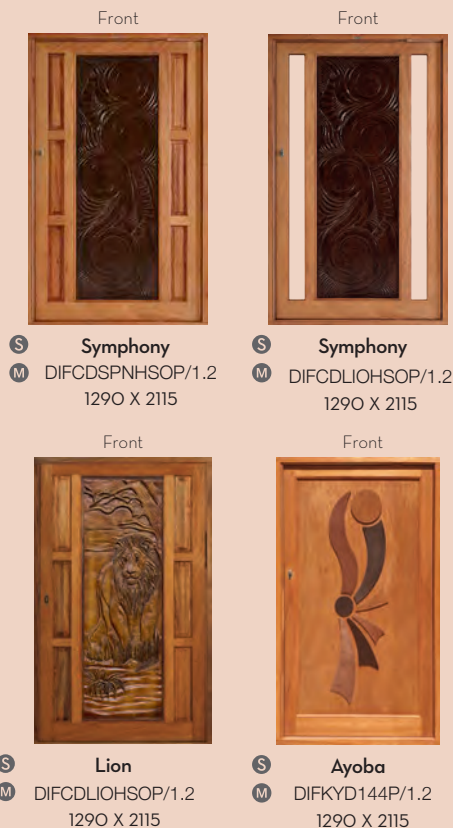


SATAS approved for exterior (Class 1) application with heavy-duty usage. Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.

## CRAFTED HARDWOOD DOORS




## DOUBLE-BOARDED BATTEN DOORS

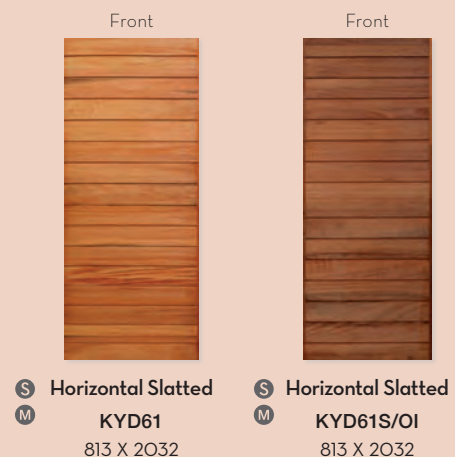


SATAS approved for exterior (Class 1) application with heavy-duty usage. Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.


## PANEL HARDWOOD DOORS

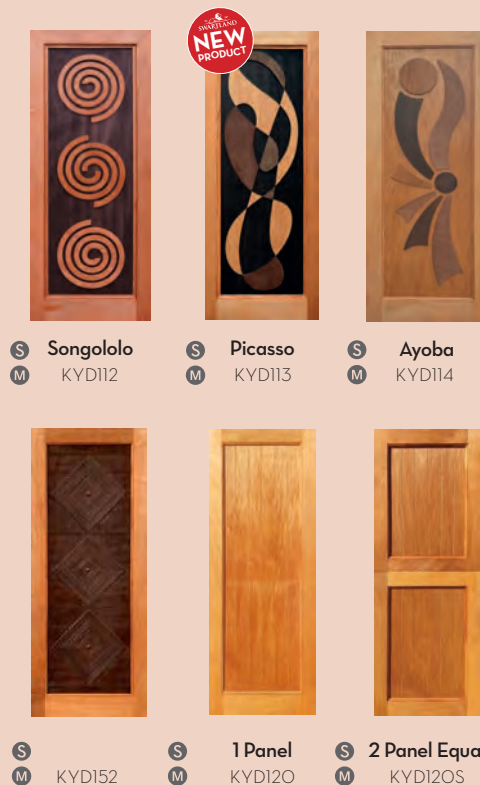

## FACE-BOARDED BATTEN DOORS

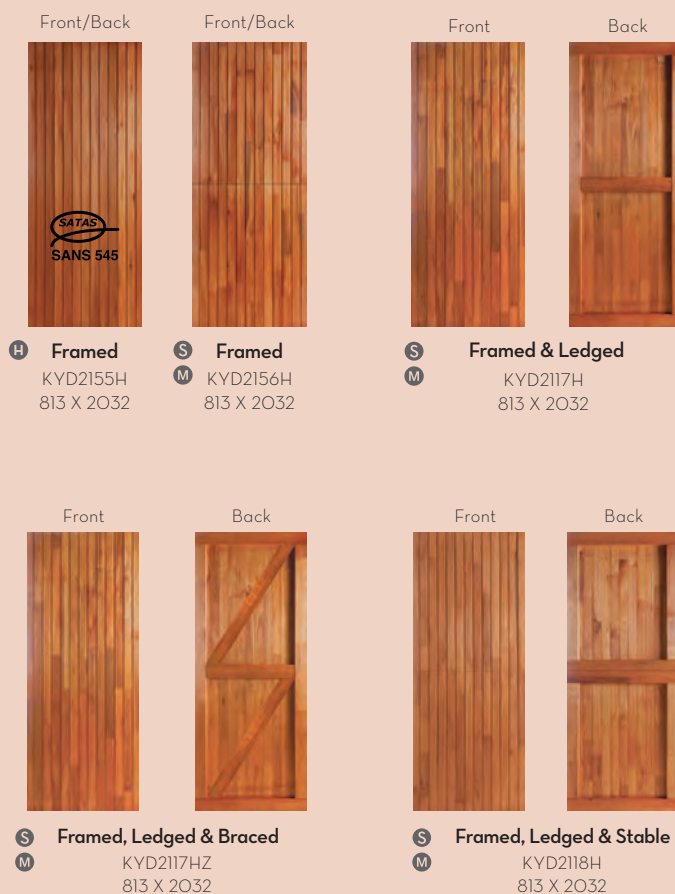

## PLANT ON ENTRANCE DOORS

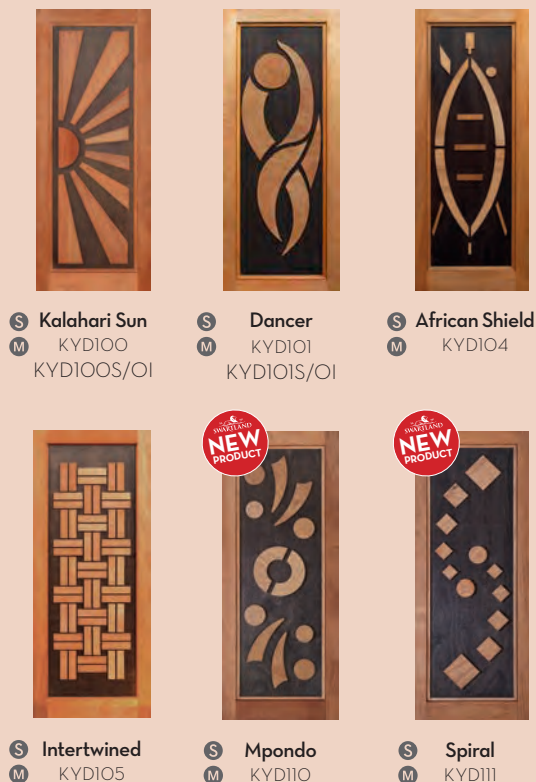

All stiles and rails are engineered. Core construction includes SA Pine.  
Wood is a natural product and colour variations may occur.

SATAS approved for exterior (Class 1) application with heavy-duty usage.  
Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

All stiles and rails are engineered. Core construction includes SA Pine.  
Wood is a natural product and colour variations may occur.



## TRADITIONAL FRAME AND LEDGED BATTEN DOORS



**S** **Framed & Ledged**  
**M** KYDI/OB  
813 X 2032



**S** **Braced**  
**M** KYDIS/OB/BR  
813 X 2032

**S** **Plyback**  
**M** KYDIS/PB  
813 X 2032



**S** **Braced**  
**M** KYDI/OB/BR  
813 X 2032

**S** **Plyback**  
**M** KYDI/PB  
813 X 2032



**S** **Framed**  
**M** KYDIS/PB  
813 X 2032

**S** **Plyback**  
**M** KYDIS/PB  
813 X 2032



**S** **Framed, Ledged & Stable**  
**M** KYDIS/OB  
813 X 2032

SATAS approved for exterior (Class 1) application with heavy-duty usage. Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.



## PNKYD2205

### HOW TO HANG A BARN DOOR

Make sure the brace is facing upwards from the fixed hinges, and that the lockset is fitted to the opposite side of the brace.



Brace must face upwards



**S** PNKYD2205  
**M** 813 x 2032

**S** PNKYD2117Z  
**M** 813 x 2032

All stiles and rails are engineered. Core construction includes SA Pine. Wood is a natural product and colour variations may occur.

## FACE-BOARDED BATTEN DOORS

Front



Back



Front



Back



**S** Battered  
**M** PNKYD2113 / PNKYD2116  
813 X 2032 / 680 X 1800


**S** Battered & Stable  
**M** PNKYD2115  
813 X 2032

## DOUBLE-BOARDED BATTEN DOORS

Front/Back



Front/Back



**E** Pine  
**H** PNKYD2155  
813 X 2032

**E** Pine Stable  
**M** PNKYD2156  
813 X 2032

## PINE PRE-GLAZED DOORS



**S** PNKYDVTLF  
**M** 813 X 2032

**S** PNKYDTLBF  
**M** 813 X 2032

## FACE-BOARDED FRAMED AND LEDGED BATTEN DOORS

Front



Back



Front



Back



**S** Framed & Ledged  
**M** PNKYD2117  
813 X 2032

**S** Braced  
**M** PNKYD2117Z  
813 X 2032

## FACE-BOARDED FRAMED AND LEDGED STABLE DOORS

Front



Back



Back



**S** Framed & Ledged  
**M** PNKYD2118  
813 X 2032

**S** Braced  
**M** PNKYD2118Z  
813 X 2032

SATAS approved for exterior (Class 1) application with heavy-duty usage. Exterior application defined as frequent exposure to unprotected open-air conditions. An overhang above the door is a requirement.

## PINE PANEL DOORS



- S** Colonial 6 Panel  
**M** PNKYD6  
813 X 2032
- S** Victorian 4 Panel  
**M** PNKYD4  
813 X 2032
- S** 8 Panel  
**M** PNKYD8  
813 X 2032
- S** 8 Panel (Stable)  
**M** PNKYD8S  
813 X 2032

## BERGSUN DOORS




- I** Imbali  
**M** BSBLMSO
- I** 8 Panel Arched  
**M** BSEPAMS0
- I** Ruby  
**M** BSRBYMSO
- I** Traditional  
**M** BSTDTMSO



- I** Commercial  
**M** BSHRZMS2 (also in 762)  
**M** BSHRZMS20  
**M** BSHRZSS2I2  
**M** BSHRZFS2  
**M** BSHRZLI0  
**M** BSHRZFS0
- I** Vertical  
**M** BSVTCMSO  
**M** BSVTCMSOSB
- I** Melody  
**M** BSMLDMSO
- I** Sebastian  
**M** BSSBTMSO

## SECURITY DOORS




- I** Quartz Half  
**M** BSQTZMS0HS
- I** Sebastian Half  
**M** BSSBTMS0HS

All stiles and rails are engineered. Core construction includes SA Pine.  
Wood is a natural product and colour variations may occur.

## PRIME PAINTED DOORS




- S** EBCLNLI0/GREY  
**M** 813 X 2032
- S** EBCTBLI0/GREY  
**M** 813 X 2032
- S** EBCSSLI0/GREY  
**M** 813 X 2032

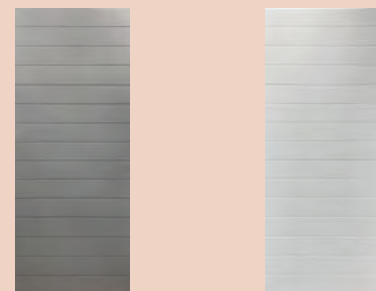


- S** EBEURHRZMI0/GREY  
**M** 813 X 2032
- S** EBEURHRZMI0/WHT  
**M** 813 X 2032

## INTERIOR DEEP MOULDED DOORS

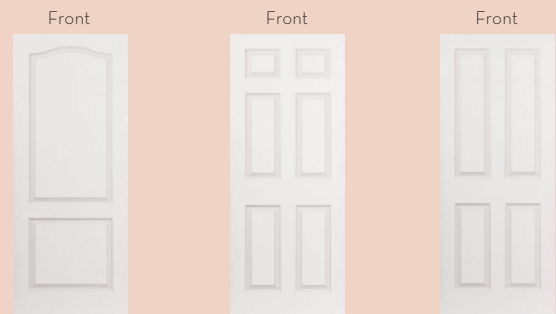

- I** Classique  
**L** EBCSSLI0  
**L** EBCSSLI0762  
**H** EBCSSHSO  
**M** EBCSSFSO
- I** Colonist  
**L** EBCLNLI0  
**L** EBCLNLI0762  
**H** EBCLNHSO  
**M** EBCLNFSO
- I** Cantebury  
**L** EBCTBLI0  
**L** EBCTBLI0762  
**H** EBCTBHSO  
**M** EBCTBFSO



- I** Elegance  
**L** EBELGLI0  
**L** EBELGLI0762  
**H** EBELGHSO  
**M** EBELGFSO
- I** Euro Linear  
**M** EBEURLINMIO

All stiles and rails are engineered. Core construction includes SA Pine.  
Wood is a natural product and colour variations may occur.



## INTERIOR PRINTED DOORS

Front




**I** Oak Print  
**L** PROAKLI0

Front




**I** Sapele Print  
**L** PRSAPLI0  
**L** PRSAPLI0762

Front



**I** Kiaat Print  
**L** PRKIALI0

Front



**I** Grey Crafted  
Print  
**L** PRORGREYLI0

Front



**I** White Crafted  
Print  
**L** PRCPWHITELI0

## INTERIOR VENEER &amp; HARDBOARD DOORS


Front




Front



Front



Front



- |                            |                        |                               |                             |
|----------------------------|------------------------|-------------------------------|-----------------------------|
| <b>I</b> Commercial Veneer | <b>I</b> Sapele Veneer | <b>I</b> Horizontal Hardboard | <b>I</b> Standard Hardboard |
| <b>L</b> VNCOMLI0          | <b>L</b> VNSAPLI0      | <b>L</b> HBHRZLI0             | <b>L</b> HBSTDLI0           |
| <b>M</b> VNCOMMI2          | <b>M</b> VNSAPMI2      | <b>H</b> HBHRZFS0             | <b>M</b> HBSTDMI2           |
| <b>F</b> VNCOMFS2          | <b>F</b> VNSAPFS2      | <b>F</b>                      | <b>H</b> HBSTDHI2           |
| VNCOMSSI0                  | VNSAPSSI0              |                               | <b>F</b> HBSTDFS0           |
| VNCOMSSI2                  | VNSAPSSI2              |                               | HBSTDSSI0                   |
|                            |                        |                               | HBSTDSSI2                   |

## DOOR APPLICATION GUIDELINES

<b>E</b> Exterior	<b>S</b> Semi-Exterior	<b>I</b> Interior	<b>F</b> Fire-Resistant	Usage
Frequent exposure to unprotected open-air conditions. Please be aware that an over-hang above the door is recommended.	Infrequent and partial exposure to unprotected open-air conditions. Do not expose to direct sunlight or rain. Please be aware that an over-hang above the door is a requirement.	Exposed to dry, sheltered (indoor) conditions only. Internal use only.	Fire-resistant doors forms part of a Class E fire-rating system. (30 minutes) 	<b>L</b> Light Duty (Domestic / Interior usage)  <b>M</b> Medium Duty (Domestic / Commercial usage)  <b>H</b> Heavy Duty (Frequent / Security usage)
Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	Treatment: Seal all 6 sides with a water-based sealant, including beading and rebates. Re-seal after trimming.	

## COMMERCIAL VENEER DOORS

Product Code	Section Sizes	Description
VNCOMLI0	813X2032 EE	Commercial light-duty interior door with exposed edges
VNCOMLI1	813X2032 1HE	Commercial light-duty interior door with 1 exposed hardwood edge
VNCOMLI2	813X2032 2HE	Commercial light-duty interior door with 2 exposed hardwood edges
VNCOMLI1762	762X2032 1HE	Commercial light-duty interior door with 1 exposed hardwood edge
VNCOMMI2	813X2032 2HE	Commercial medium-duty interior door with 2 exposed hardwood edges
VNCOMFS2	813X2032 2HE	Commercial fire door with 2 exposed hardwood edges
VNCOMSSI0	813X2032 EE	Commercial semi-solid door with exposed edges
VNCOMSSI2	813X2032 2HE	Commercial semi-solid door with 2 exposed hardwood edges

## SAPELE VENEER DOORS

Product Code	Section Sizes	Description
VNSAPLI0	813X2032 EE	Sapele light-duty interior door with exposed edges
VNSAPLI0762	762X2032 EE	Sapele light-duty interior door with exposed edges
VNSAPLI1	813X2032 1HE	Sapele light-duty interior door with 1 exposed hardwood edge
VNSAPLI2	813X2032 2HE	Sapele light-duty interior door with 2 exposed hardwood edges
VNSAPMI2	813X2032 2HE	Sapele medium-duty interior door with 2 exposed hardwood edges
VNSAPFS2	813X2032 2HE	Sapele fire door with 2 exposed hardwood edges
VNSAPSSI0	813X2032 EE	Sapele semi-solid door with exposed edges
VNSAPSSI2	813X2032 2HE	Sapele semi-solid door with 2 exposed hardwood edges

## INTERIOR HARDBOARD DOOR CODES

Product Code	Section Sizes	Description
HBSTDLI0	813 X 2032 EE	Standard light-duty interior door with exposed edges
HBSTDLI0762	762 X 2032 EE	Standard light-duty interior door with exposed edges
HBSTDLI0M	813 X 2032 EE	Standard light-duty interior door with exposed edges
HBSTDMI2	813 X 2032 2HE	Standard medium-duty interior door with 2 exposed hardwood edges
HBSTDMI2762	762 X 2032 2HE	Standard medium-duty interior door with 2 exposed hardwood edges
HBSTDHI2	813 X 2032 2HE	Standard heavy-duty interior door with 2 exposed hardwood edges
HBSTDSSI0	813 X 2032 EE	Standard semi-solid, interior door with exposed edges
HBSTDSSI2	813 X 2032 2HE	Standard semi-solid, interior door with 2 exposed hardwood edges
HBHRZLI0	813 X 2032 EE	Horizontal light duty interior door with exposed edges
HBSTDFS0	813 X 2032 EE	Standard heavy duty fire door with exposed edges
HBHRZFS0	813 X 2032 EE	Standard heavy duty fire door with exposed edges

Code	Description
EE	Exposed pine vertical door edges
1HE	1 Exposed hardwood vertical door edge
2HE	2 Exposed hardwood vertical door edges

Fire-resistant doors form part of a Class E fire-rating system. (30 minutes)

All stiles and rails are engineered. Core construction includes SA Pine.  
Wood is a natural product and colour variations may occur.

All stiles and rails are engineered. Core construction includes SA Pine.  
Wood is a natural product and colour variations may occur.


# KAYO DOOR FRAMES RANGE

HARDWOOD DOOR FRAMES			PINE DOOR FRAMES		
Product Code	Section	Door Size	Product Code	Section	Door Size
KKYFDI/NS	60 X 38	813mm	KPNKYFDI/NS	67 X 44	813mm
KYFDI/NS	60 X 38	813mm	PNKYFDI/NS	67 X 44	813mm
KKYFCI/NS	76 X 51	813mm	KPNKYFDI/NS/W	67 X 44	813mm
KKYFCI/OI	76 X 51	813mm	PNKYFDI/NS/W	67 X 44	813mm
KKYFCI/OO	76 X 51	813mm	KPNKYFBI/NS	80 X 44	813mm
KYFCI/NS	76 X 51	813mm	PNKYFBI/NS	80 X 44	813mm
KYFCI/OI	76 X 51	813mm	KPNKYFBI/NS/W	80 X 44	813mm
KYFCI/OO	76 X 51	813mm	PNKYFBI/NS/W	80 X 44	813mm
KKYFBI/NS	76 X 38	813mm	HARDWOOD DOOR FRAMES WITH SIDE LIGHT		
KKYFBI/OI	76 X 38	813mm			
KKYFBI/OO	76 X 38	813mm			
KYFBI/NS	76 X 38	813mm	Product Code	Section	Door Size
KYFBI/OI	76 X 38	813mm	KKYSLFIL/NS	76 X 38	813mm
KYFBI/OO	76 X 38	813mm	KYSLFIL/NS	76 X 38	813mm
KKYFHI/NS	86 X 67	813mm	KKYSLFIR/NS	76 X 38	813mm
KYFHI/NS	86 X 67	813mm	KYSLFIR/NS	76 X 38	813mm
KYFHI/OI	86 X 67	813mm	KKYSLF4/NS	76 X 38	813mm
KYFHI/OO	86 X 67	813mm	KYSLF4/NS	76 X 38	813mm
KKYFHI/OI	86 X 67	813mm			
KKYFHI/OO	86 X 67	813mm			


Door frames can be delivered knock-down in kit form (Unassembled), e.g. KKYFDI/NS, to save on storage and transport costs, or assembled e.g. KYFDI/NS.

Always use KAYO door frames with KAYO doors. Please be aware that other manufacturers' rebate sizes may differ from Kayo and will not match Kayo doors.

## SIDE LIGHT DOOR FRAMES

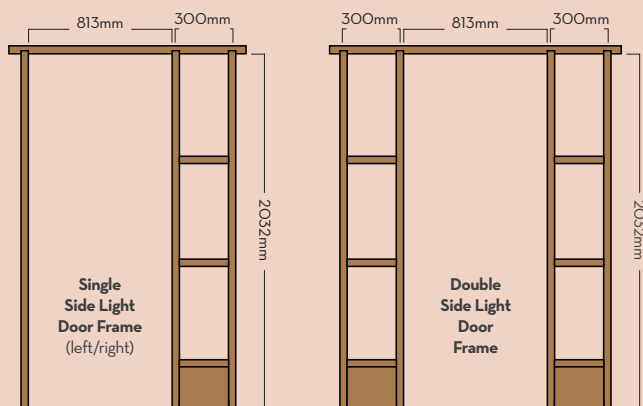

## RECOMMENDED DOOR THICKNESS

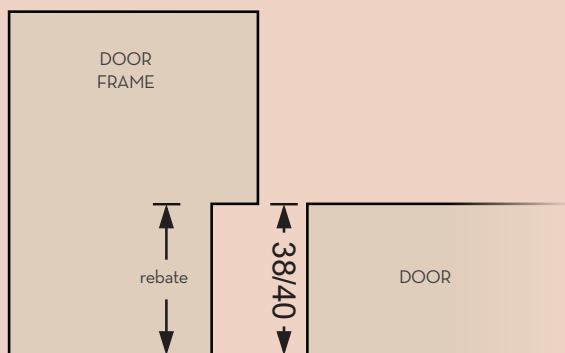

NOTE: We recommend a door thickness of 38-40mm for the KAYO door frame range.

For detailed product specifications please visit [www.swartland.co.za](http://www.swartland.co.za)


## HANDLING

All products must be stored off the ground in a dry, well-ventilated area and kept out of direct sunlight. All surfaces in direct contact with walls or concrete must be sealed with a coat of water-based sealant.

## DOOR INSTALLATION



## TRIMMING SPECS

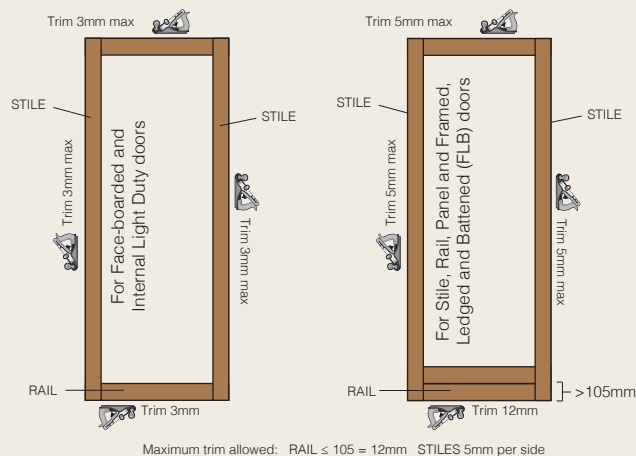


## DRY ROT PREVENTION

We go to great lengths to seal our products thoroughly.

To limit dry rot, please ensure you adhere to the installation guidelines.

More information at [www.swartland.co.za](http://www.swartland.co.za)

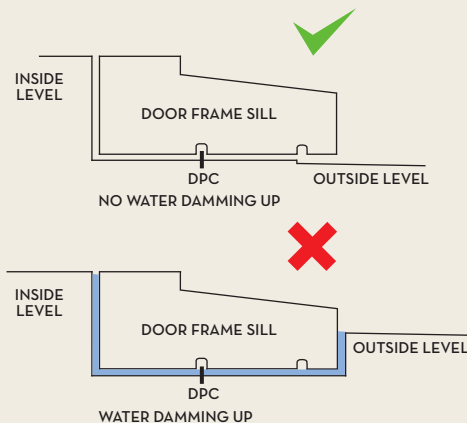




## SWARTLAND OFFERS 30 MINUTE FIRE RATED WOODEN DOORS AND TIMBER DOORFRAMES.

Swartland's fire door leaf has been tested by the SABS in accordance with SANS 1253:2003 and has been certified as a Class E (30 minute fire rated) component of a Class E Fire Door Assembly. A copy of the test report is available on request.

## EXTERIOR COMMERCIAL / HARDWOOD FACED FIRE DOOR



Horizontal Grooved  
PD652



Detail section showing  
Mixed Timber Core

PD652 is a Solid Laminated Mixed Timber Flush Door, consisting of Hardwood Face Veneers, Hardwood Concealed Edges and a Mixed Timber core.

It's also **Class 1 (Exterior) Heavy Duty Door** certified (SABS Test Report: 2536/BMT-171003-00001, 31/10/2017).

### Class E Fire Door Assembly specifications

DOOR	Swartland 30 minute fire rated door leaf
DOOR FRAME	Swartland 30 minute fire rated KYFH1/NS 67x86mm timber door frame with 43x25mm rebate OR Steel door frame, 1,6mm thick with 48x25mm rebate
HINGES	3x 100mm Butt hinges for frames of which the height does not exceed 2.08m. All other frames shall have at least four hinges per leaf.
IRONMONGERY	Standard Mortice Lock and pressed steel handles

Only once the entire Class E Fire door assembly is correctly installed, will the unit comply with the appropriate building regulations governing fire protection and a manufacturer's fire certificate of compliance can be issued.

## BERGSUN DOORS AND INTERIOR VENEER & HARDBOARD DOORS

The following fire doors are available for internal use:



Bergsun Commercial BSHRZFS2  
Commercial Veneer VNCOMFS2  
Sapele Veneer VNSAPFS2  
Horizontal Hardboard HBRZFS10  
Standard Hardboard HBSTDFS10

## INTERIOR DEEP MOULDED DOORS



Canterbury EBCTBFS0  
Colonist EBCLNFS0  
Classique EBCSSFS0  
Elegance EBELGFS0

All Flush Doors maximum rated size: 2400x1200x 40mm  
All Deep Moulded maximum rated size: 2032 x 813 x 40mm

### Reference SABS test Reports for fire rating:

Flush door: 2538/85790/FPE14

Deep moulded door: 2538/85831/FPE14

PD652 door: BCT-180313-00042 dated 16/4/2018


## SWARTLAND OFFERS THE FOLLOWING FIRE DOOR FRAMES:

Product Code	Size	Overall dimension	Description
KYFH1/ NS	86 x 67	897 x 2101mm	30 Minute fire door frame with 25mm rebate, with no sill
KYFH1/OI	86 x 67	897 x 2112mm	30 Minute fire door frame with 25mm rebate, with sill, open in
KYFH1/OO	86 x 67	897 x 2128mm	30 Minute fire door frame with 25mm rebate, with sill, open out

DOES NOT COMPLY ❌ COMPLIES ✅



SK1/NS



KYFH1/NS



## SWARTLAND

The Swartland story began back in 1951 in the small town of Moorreesburg – a few wheat fields north of Cape Town.

In the late 1980s, the philosophy of ‘continuous improvement’ was instilled in the business.

Today this desire to keep improving is an integral part of the Swartland culture, where traditional values such as hard work and pride live in harmony with new technology and ongoing innovation.

The results speak for themselves: our products are crafted to perfection, manufactured to last and backed by expert national sales and service teams.

**National Call Centre: 0861 10 24 25**

**SANS613**  
CERTIFIED



**SABS**  
ISO 9001

[WWW.SWARTLAND.CO.ZA](http://WWW.SWARTLAND.CO.ZA)

**HEAD OFFICE:** 0861 10 24 25

**Cape Town:** 0861 10 24 25

**Johannesburg:** 0861 10 24 25

**Durban:** 0861 10 24 25

**Port Elizabeth:** 041 487 1342

**East London:** 043 745 0410

**Namibia:** 00 264 612 49558



## THE SWARTLAND FAMILY OF BRANDS



Sep 2022

The information contained in this catalogue was accurate at the time of going to print. All Pictures shown are for illustration purpose only. Actual product may vary due to product enhancement. Swartland Investments (Pty) Ltd reserves the right to change product designs and specifications in line with our continuous development programme.

TERMS AND CONDITIONS APPLY. SEE GUARANTEE CERTIFICATE FOR DETAILS.